





INDOOR BOX (CTO) | 4+24
PORTS - 24 MERGES (SUITABLE
FOR CASSETTE-BOX SPLITTER)_
IP54
Manual & Information



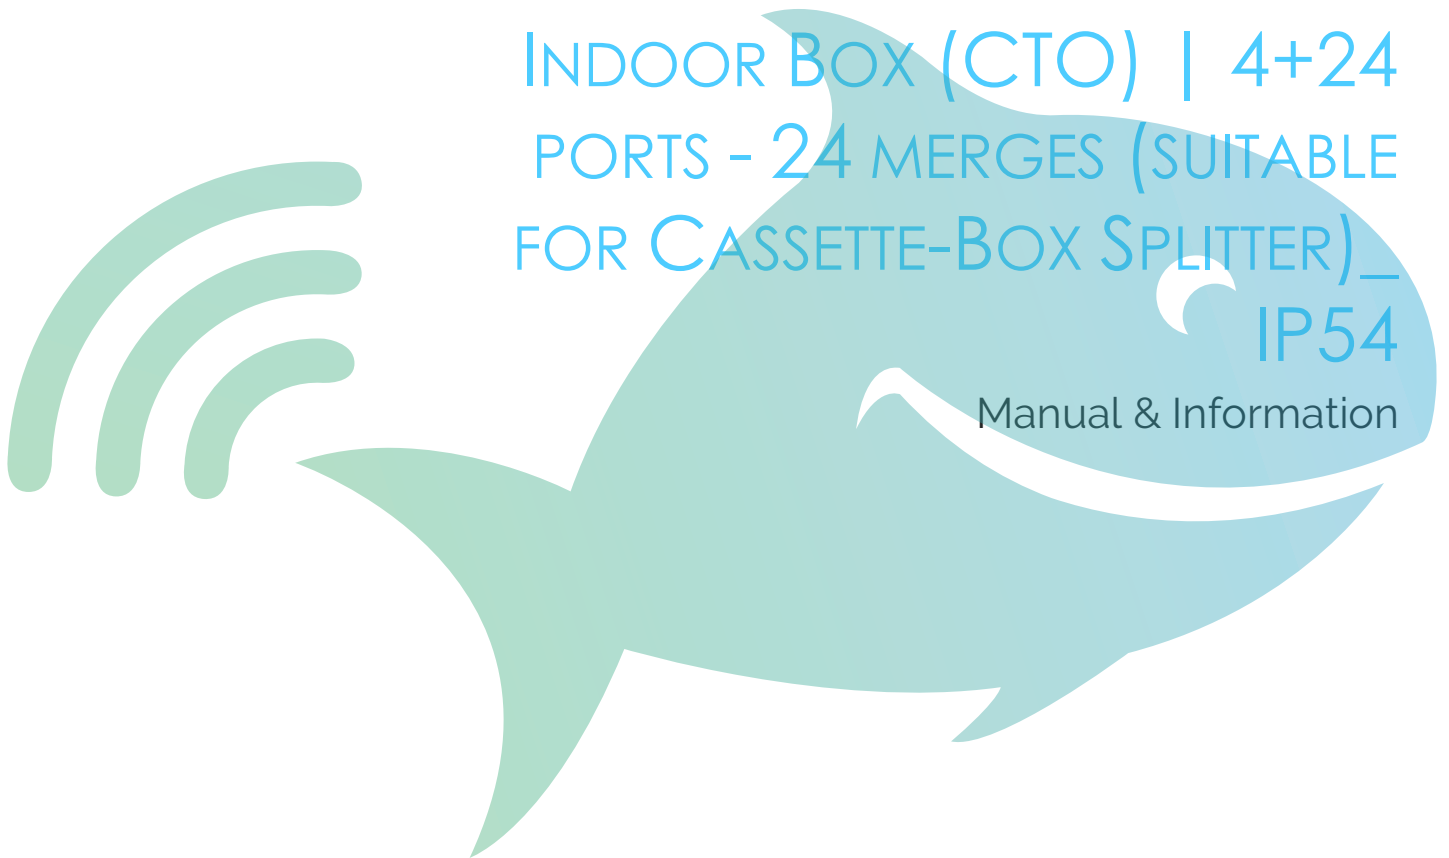

Contents

1	Features	3
1.1	General Details	3
1.2	Aplicatrions	3
1.3	Specifications	5

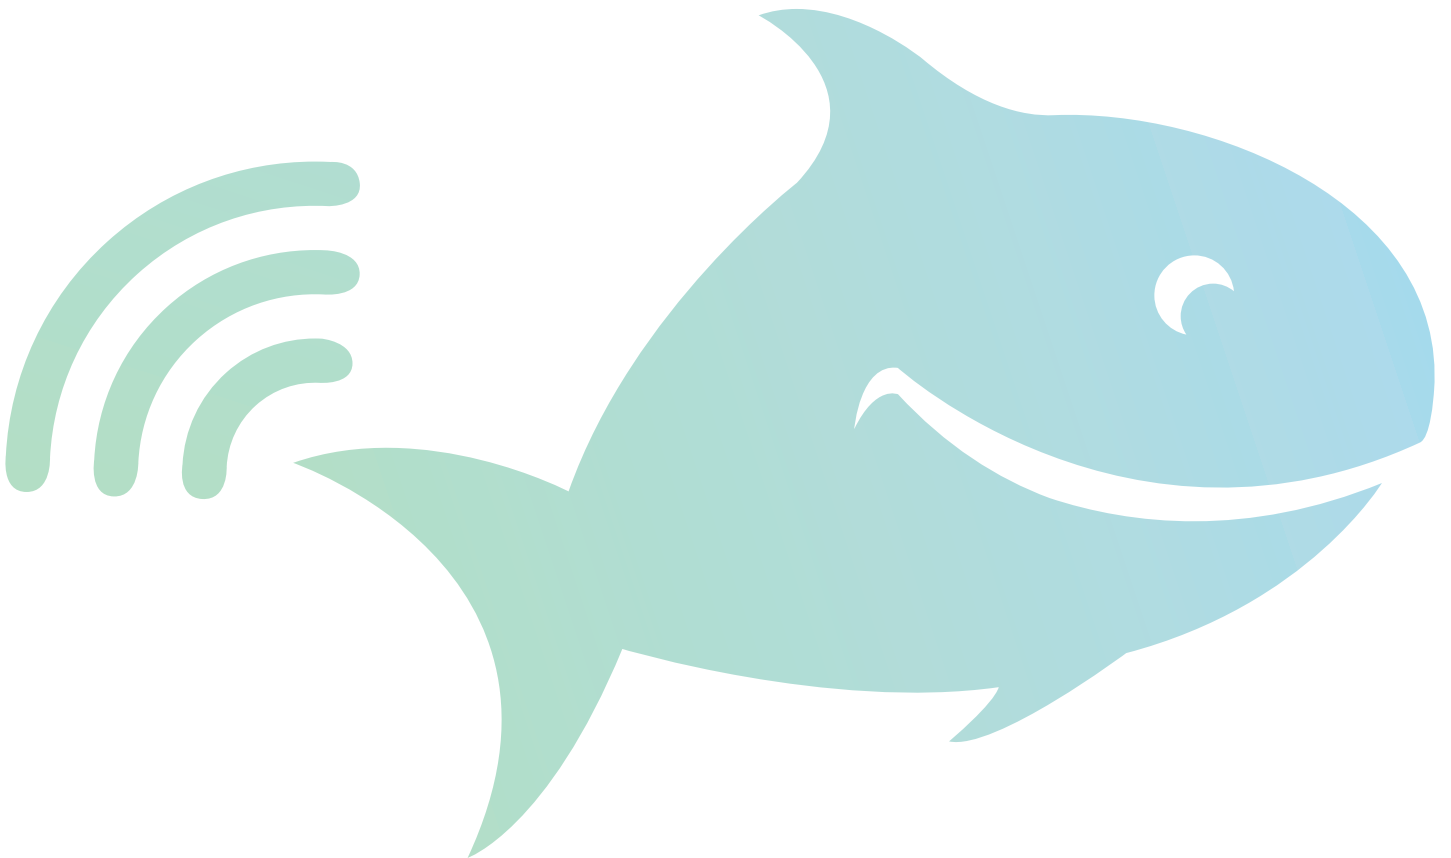



1 Features


1.1 General Details

305mm×236mm×100mm(L×W×H)

- 1) Accommodate PLC Splitter Module ;
- 2) Anti-UV(Ultra Violet) ;
- 3) Grounding device included ;
- 4) 2 inlet ports, 16 outlet ports ;
- 5) Ability to store uncut cables ;
- 6) Economic design with plastic adaptor panel ;
- 7) Accommodate SC /APC, SC/UPC adaptor ;
- 8) It is applicable for wall-mounted,indoor or outdoor ;
- 9) Max capacity(F):16.

1.2 Applications

- FTTH access network
- Telecommunication Network
- CATV Networks
- Data communications Network
- Local Area Networks
- Wall-mounted, Indoor or Outdoor

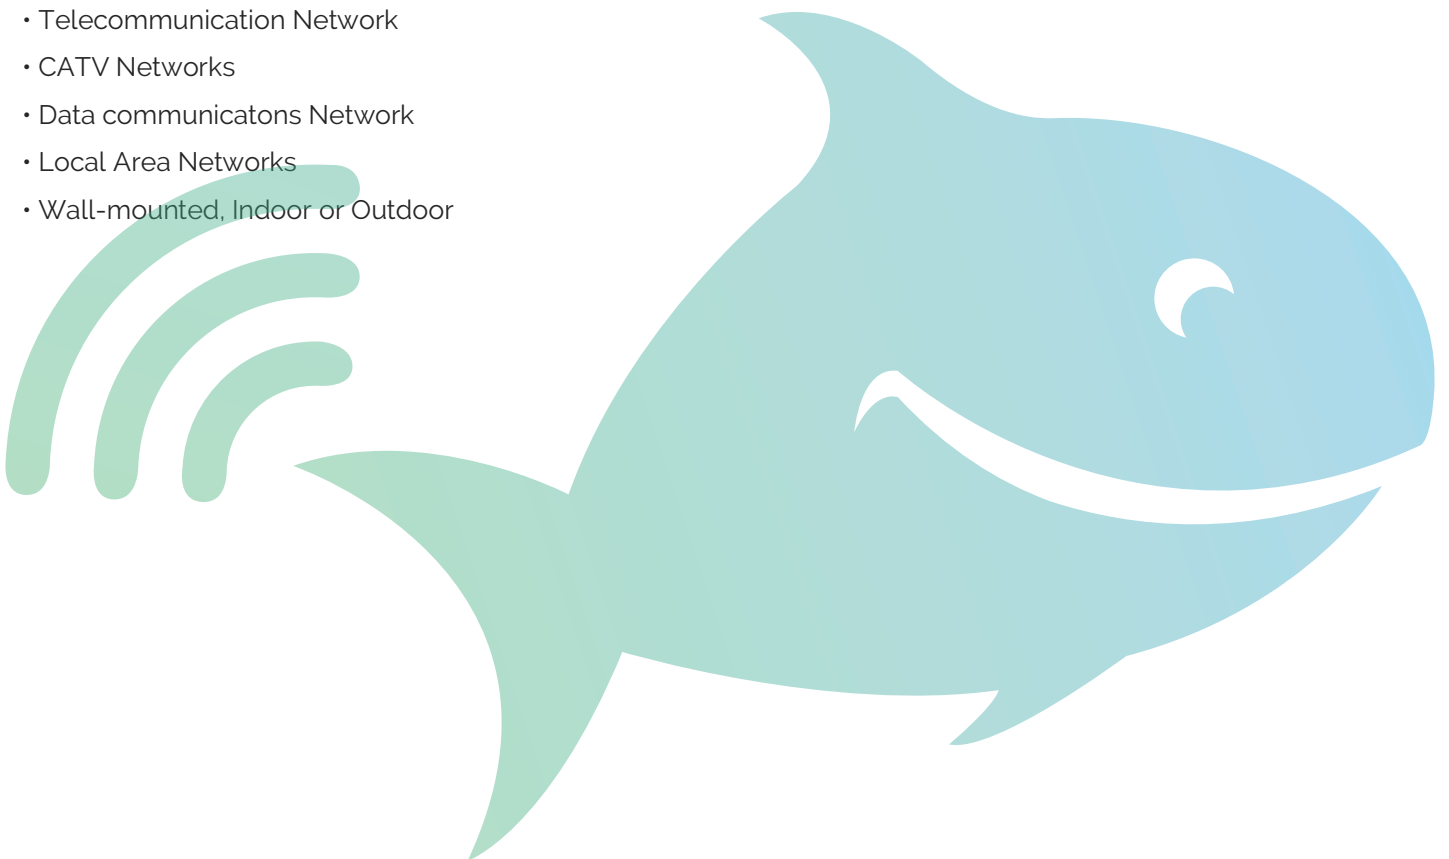



Name	Indoor Box (CTO) 4+24 ports - 24 merges (suitable for Cassette-Box Splitter)_ IP54
Application	Indoor and outdoor installation
Photos	



1.3 Specifications

Cable Port	2 cable ports(for cables with max diameter 16mm) +16 drop cable ports
PLC splitter	2 pcs of 1x8 or 1 pc of 1x16 Blade type (LGX type) splitter; or 1 pc of 1x8 box type(ABS) PLC splitter
Protection Class	IP54